


VICTOR

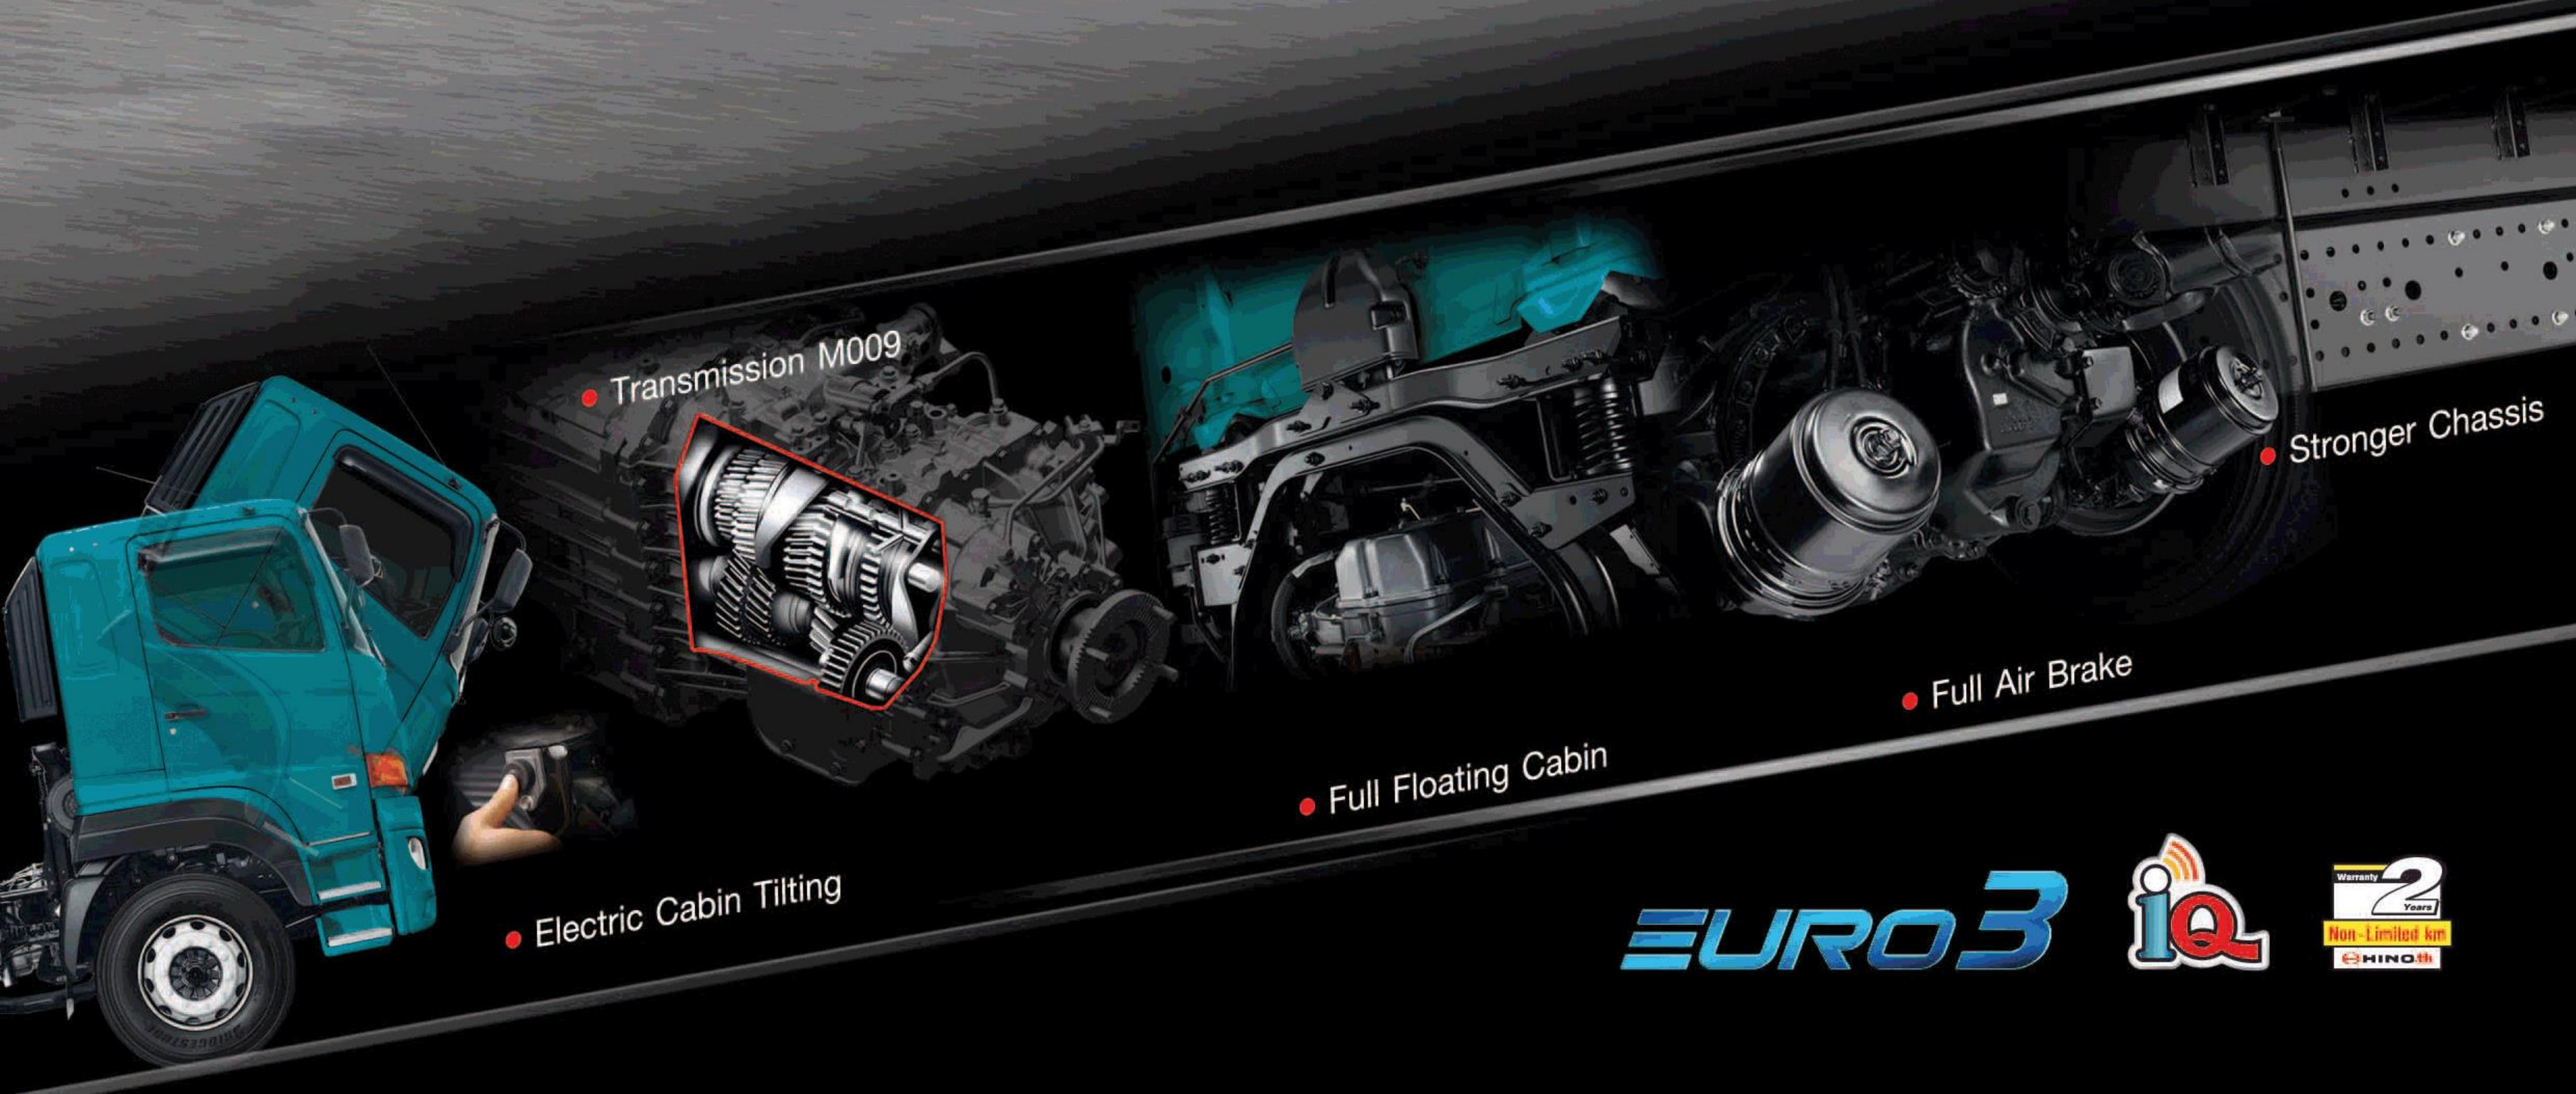

• Transmission M009

• Stronger Chassis

• Full Air Brake

• Full Floating Cabin

• Electric Cabin Tilting

EURO3



PERFORMANCE & GEAR RATIO

Model		GY2PS1A-XHT	
Max. speed (Km/h)		112	125
Gradeability % (Degree)		54.4 (28.6)	47.5 (25.4)
Transmission model		M009 OD	
Gear ratio	Crawler	10.178	
	1st	6.986	
	2nd	5.063	
	3rd	3.636	
	4th	2.633	
	5th	1.921	
	6th	1.392	
	7th	1.000	
	8th	0.724	
Rev.		9.874	
Rear axle gear ratio		5.428	4.875

ENGINE

Max.output (EEC Net)	HINO P11C-VU 280 kW (380 PS) at 2,100 rpm
Max.torque (EEC Net)	1,422 N.m (145 kgf.m) at 1,500 rpm
Type	Diesel 4-stroke cycle, Vertical 6 cylinder In-line, Overhead camshaft, Water-cooled Turbo intercooler
Fuel injection pump	Electronic control, Commonrail type
Bore x Stroke	122 x 150 mm
Piston displacement	10,520 cc
Compression ratio	16.0 : 1
Emission level	EURO 3

CLUTCH

Dry single plate, Hydraulic control
with air booster

TRANSMISSION

9 Speeds, Overdrive
Synchromesh crawler - 8th

FRONT AXLE

Type	Reverse elliot "I" section beam
Axle capacity	13,000 kg

REAR AXLE

Type	Full-floating, Single reduction, Hypoid gearing
Axle capacity	21,000 kg

SERVICE BRAKE

Type	Leading-trailing shoes operating by S-cam shaft and slack adjuster acting on all wheels
Control	Full air, Dual circuits

PARKING BRAKE

Type	Wheel parking acting on F2 and R1 axle
------	--

EXHAUST BRAKE

Type	Butterfly valve type
------	----------------------

STEERING

Type	Recirculating ball with hydraulic booster
Gear ratio	19.0

SUSPENSION

Front	Semi-elliptic leaf springs with shock absorbers
Rear	Semi-elliptic main with torque rods

WHEELS & TIRES

Disc wheel	22.5 x 7.50, 10 studs
Tire size	11R22.5-16PR

FUEL TANK

Capacity	370 L
----------	-------

CHASSIS FRAME

Type	Ladder-shaped channel section side rails "I"
------	--

CAB

Type	All steel welded construction, Laminated safety glass applied
------	--

ELECTRICAL EQUIPMENT

Batteries	12 V, 120 Ah. X 2
Alternator	24 V, 60 A

AIR CONDITIONER

Denso

SAFETY

SRS Airbag, Adjustable headlamp

COMFORTABILITY

Power window & Central lock

OPTION

Wind deflector, ABS, PTO

Description				GY2PS1A-XHT	
Gross vehicle weight (GVW)				kg	30,000
Chassis weight	Front	kg			5,500
	Rear	kg			3,300
	Total	kg			8,800
Turning radius	Tire	mm			10,100
	Swept	mm			10,800
Road clearance	At differential case	mm			250
Number of seat					3

DIMENSIONS

Unit : mm

Model	A	B	C	D	E	E'	F	G	H	I	J	K
GY2PS1A-XHT	5,505	9,645	2,460	2,900	4,760	7,460	2,700	1,025	1,070	2,055	1,860	840

A - Wheelbase

B - Overall length

C - Rear tire width

D - Overall height

E - Cab to rear axle

E' - Cab to end frame

F - Rear overhang



G - Frame height at front axle

H - Frame height at rear axle

I - Front tread

J - Rear tread

K - Chassis width

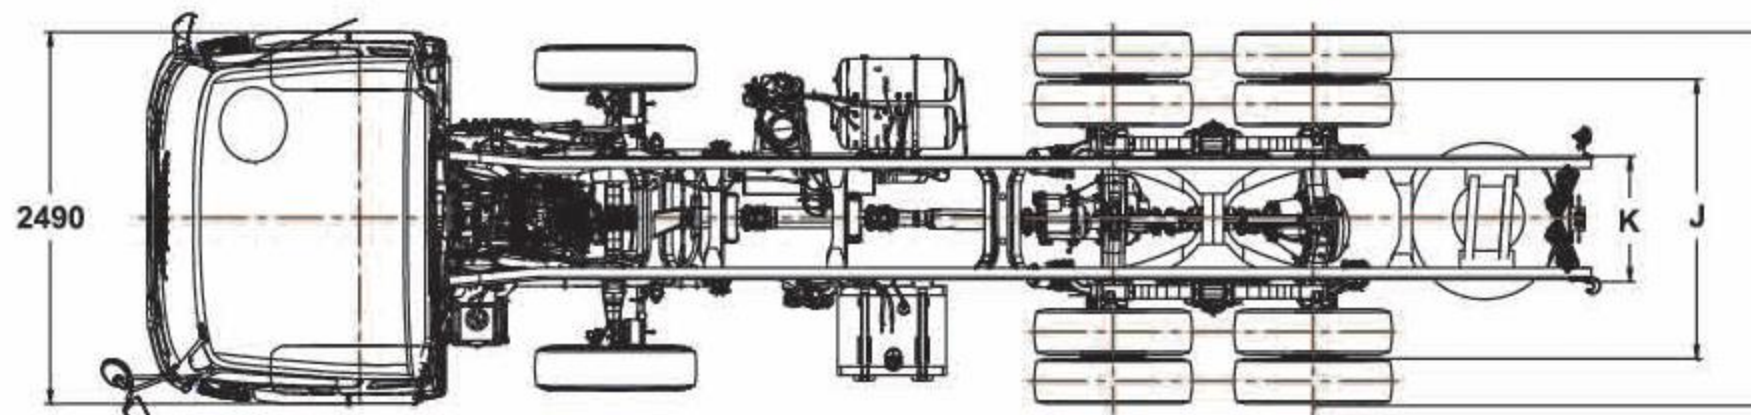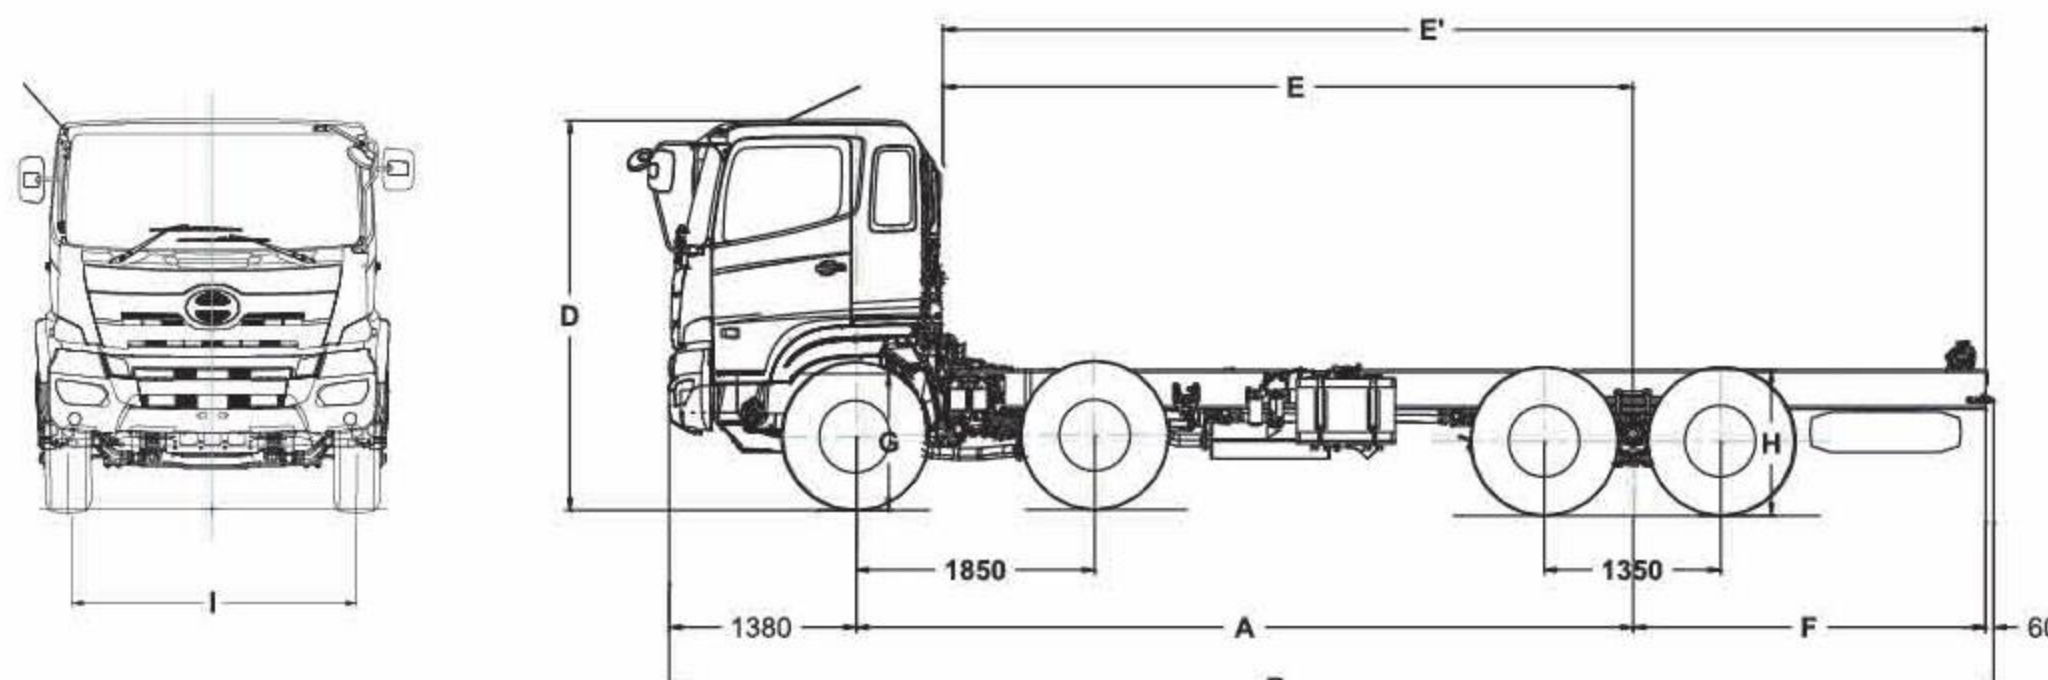

Remark : HINO MOTORS SALES (Thailand) Ltd., has rights to change specifications without prior notice.



Hino Motors Sales (Thailand) Ltd.

Tel. 0-2900-5000 Fax : 0-2900-5288 Hotline : 0-2305-4442

E-mail: info@hinothailand.com http://www.hinothailand.com



Hino Thailand Fan Club



@hinothailand



hinothailandfanclub

www.hinothailand.com



สั่งซื้อรถติดต่อ

LINE: @LOVEHINO

LOVEHINO HOTLINE

085-137-5367