

HINO 300 INNOVATOR



- Chassis Dimensions
88 Millimeters Longer

- Foldable Gear Shifter ●



- SRS Airbag
with Safety Belt



COMMONRAIL DIRECT INJECTION
WITH 136 PS TURBO

XZU
600R-4W

SPECIFICATION OF HINO 4 WHEELS TRUCK MODEL XZU600R-HKMLKT3

INNOVATOR

XZU
600R-4W

Type 4 x 2

PERFORMANCE & GEAR RATIO

Model		XZU600R-HKMLKT3
Max. speed (Km/h)		131
Gradeability % (Degree)		58.0 (30.1)
Transmission model		MY55A
Gear ratio	1st	5.315
	2nd	2.908
	3rd	1.558
	4th	1.000
	5th	0.721
	Rev.	5.068
Differential ratio		4.625

REAR AXLE

Type Full-floating, Single reduction, Hypoid gearing
Axle capacity 4,400 kg

SERVICE BRAKE

Type Hydraulic system, Two leading shoes for front and rear acting on all wheels
Control Vacuum hydraulic, Dual circuits

PARKING BRAKE

Type Mechanical, Internal-expanding acting on transmission output shaft

EXHAUST BRAKE

Type Electric-pneumatic with valve in exhaust pipe

STEERING

Type Recirculating ball with hydraulic booster
Gear ratio 22.6

SUSPENSION

Front Semi-elliptic leaf springs with shock absorbers
Rear Semi-elliptic leaf springs with shock absorbers

WHEELS & TIRES

Disc wheel 16 x 5.50F-115, 5 Studs
Tire size 7.00R16-12PR

FUEL TANK

Capacity 80 L

CHASSIS FRAME

Type Ladder-shaped channel section side rails "I"

CAB

Type All steel welded construction, Laminated safety glass applied

ELECTRICAL EQUIPMENT

Batteries 12V, 60 Ah. X 2

Alternator 24V, 60 A

AIR CONDITIONER

Denso

SAFETY

SRS Airbag

OPTION

Wind deflector, PTO

ENGINE

Max. output (EEC NET) 100 kW (136 PS)
at 2,500 rpm
Max. torque (EEC NET) 392 N.m (40 kgf.m)
at 1,600 rpm
Type Diesel 4-stroke cycle, Vertical 4 cylinder
In-line, Overhead valve, Water-cooled
Turbo intercooler
Fuel injection pump Electronic control, Commonrail type
Bore x Stroke 104 x 118 mm
Piston displacement 4,009 cc
Compression ratio 18.0 : 1
Emission level EURO 3

HINO N04C-VA

CLUTCH

Dry single plate, Hydraulic control
Auto adjust

TRANSMISSION

5 Speeds, Overdrive
Synchromesh 1st - 5th

FRONT AXLE

Type Reverse elliot "I" section beam
Axle capacity 2,600 kg

Description				XZU600R-HKMLKT3			
Gross vehicle weight (GVW)				kg	4,500		
Chassis weight	Front	kg	1,375				
	Rear	kg	595				
	Total	kg	1,970				
Turning radius	Tire	mm	5,500				
	Swept	mm	6,040				
Road clearance	At differential case	mm	210				
Number of seat				3			

DIMENSIONS

Unit : mm

Model	A	B	C	D	E	E'	F	G	H	I	J	K
XZU600R-HKMLKT3	2,540	4,660	1,544	2,135	1,945	3,082	1,137	655	725	1,400	1,350	700

A - Wheelbase

B - Overall length

C - Rear tire width

D - Overall height

E - Cab to rear axle

E' - Cab to end frame

F - Rear overhang




G - Frame height at front axle

H - Frame height at rear axle

I - Front tread

J - Rear tread

K - Chassis width

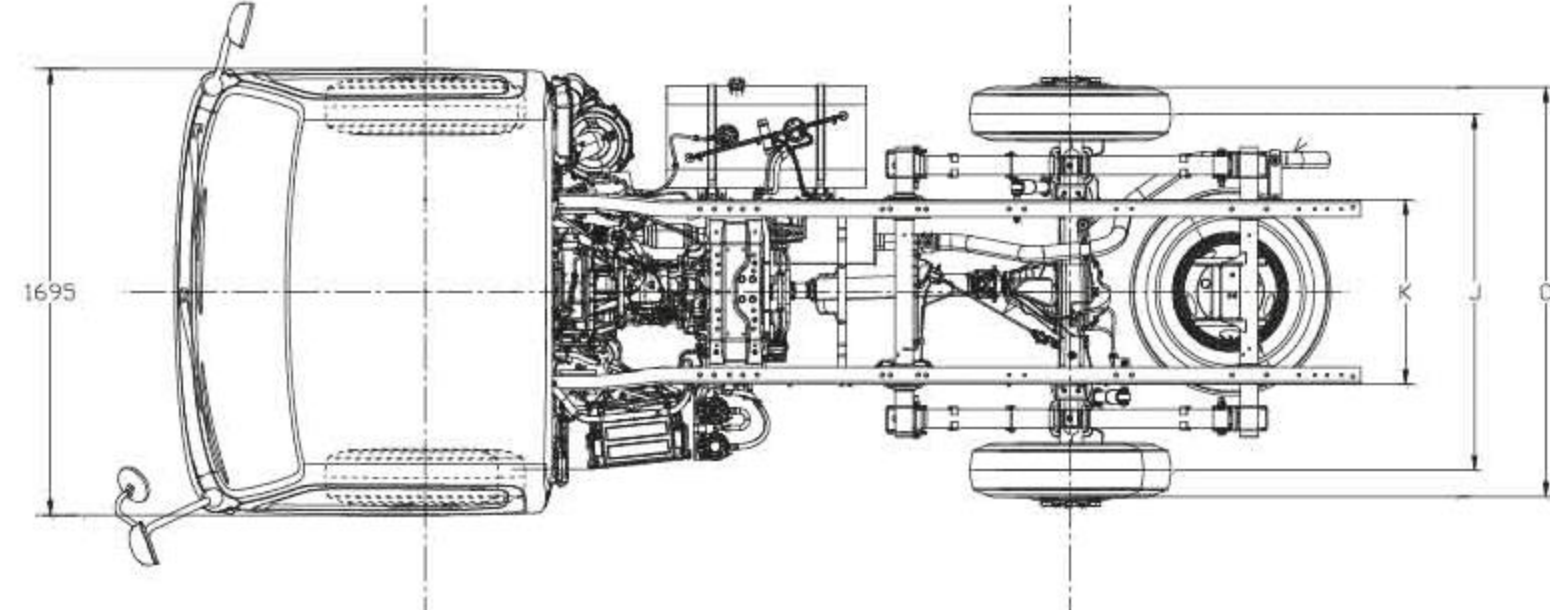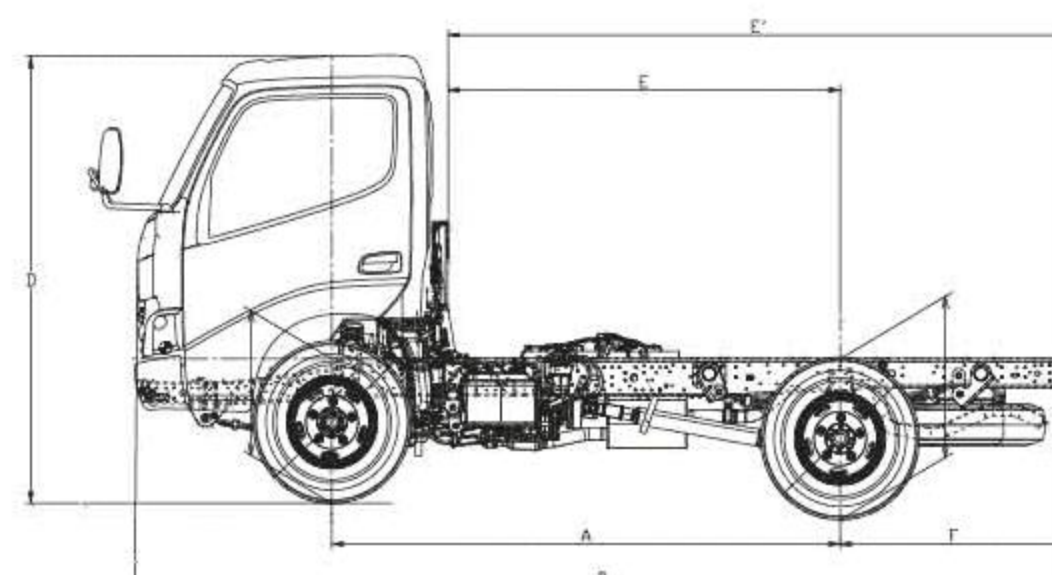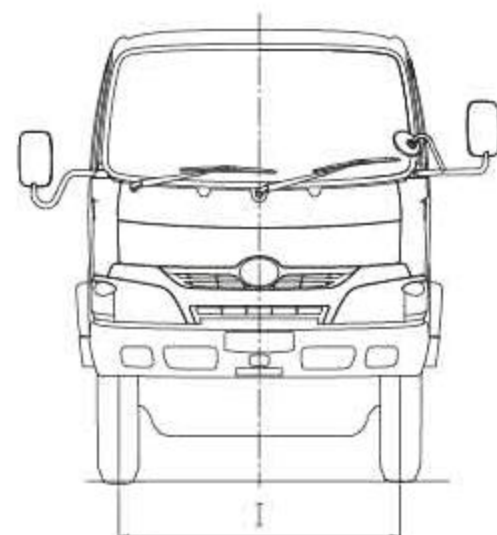

Remark : HINO MOTORS SALES (Thailand) Ltd., has rights to change specifications without prior notice.

HINO.th

Hino Motors Sales (Thailand) Ltd.

Tel. 0-2900-5000 Fax : 0-2900-5288 Hotline : 0-2305-4442

E-mail: info@hinothailand.com http://www.hinothailand.com

EURO3



f Hino Thailand Fan Club @hinothailand hinothailandfanclub

www.hinothailand.com



ตั้งชื่อรถติดต่อ

LINE: @LOVEHINO

LOVEHINO HOTLINE

085-137-5367

Doc. No. L-XZU-0218 (EN)